

Low Flow Prerinse Spray Valve Test Summary

Manufacturer	T&S Brass
Model	JetSpray B-0108-C
Rated spec	1.20 gpm @ 60 psi

Report No.	FSTC 08.09.06
Date	08.09.06
Tested by	PG&E's Food Service Technology Center

Test Parameters

- Water Pressure @ 60 ± 2 psi
- Water Temperature @ 120 ± 4°F

Nozzle # 1

Test	Water Flow (gpm)	Cleanability (seconds)
1	1.18	21.52
2	1.17	20.12
3	1.17	20.24
Average	1.17	20.63

Nozzle # 2

Test	Water Flow (gpm)	Cleanability (seconds)
1	1.11	22.06
2	1.11	20.06
3	1.11	19.11
Average	1.11	20.41


Nozzle # 3

Test	Water Flow (gpm)	Cleanability (seconds)
1	1.08	23.86
2	1.07	21.91
3	1.08	23.14
Average	1.07	22.97


Average Results:

	Average Water Flow (gpm)	Cleanability (seconds)
Nozzle #1	1.17	20.63
Nozzle #2	1.11	20.41
Nozzle #3	1.07	22.97
Overall Average	1.12	21.34

Low Flow Pre-Rinse Valve
Nozzle Number versus Water Flow

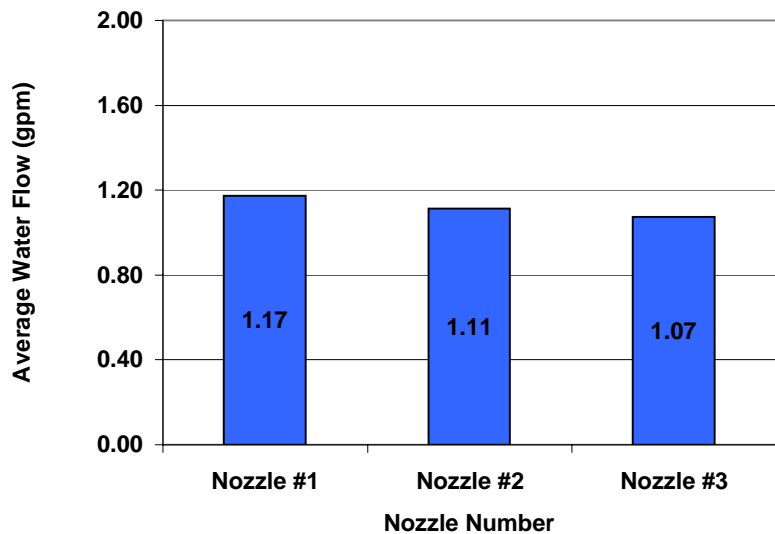

Low Flow Pre-Rinse Valve
Nozzle Number versus Cleanability Time

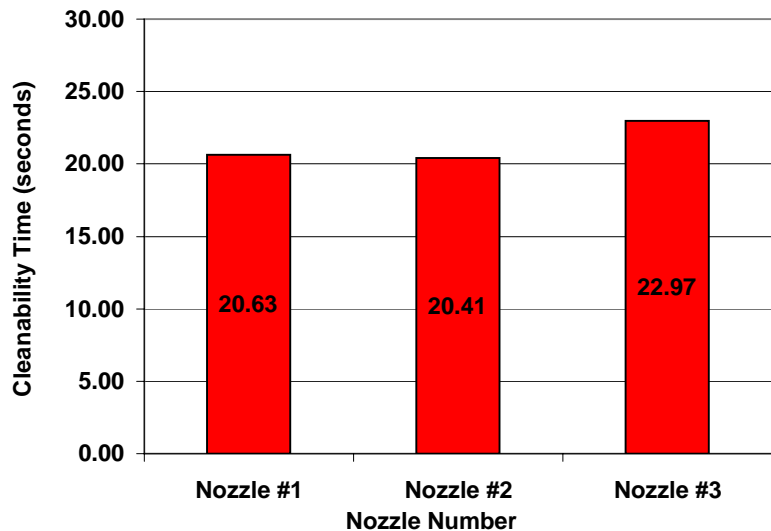

Food Service Technology Center
12949 Alcosta Blvd., Suite #101
San Ramon, Ca 94583
800.398.3782

Testing in Accordance with ASTM F2324 - 03
Standard Test Method for Prerinse Spray Valves