

Blodgett, Model SHO-G Gas Full-Size Convection Oven Performance Test

Application of ASTM Standard
Test Method F 1496-99
SCGAT060804A

Energy Resource Center
Downey, CA
August 2006

Prepared by:
The Gas Company



Disclaimer

"The information and analysis contained in this report is based on data collected at the Energy Resource Center. The Gas Company has made reasonable efforts to ensure that all information is correct; however, the Gas Company makes no representation or warranty, express or implied, as to the accuracy, correctness or usefulness of any data or information in this report. Nothing contained in this report is intended to constitute a recommendation, endorsement, approval or guaranty of any product or service. The Gas Company shall not be responsible for errors or omissions in this report or for claims or damages relating to the use of this report, even if it has been advised of the possibility of such damages. All trademarks, methods, processes or other intellectual property contained in or described in this report are the property of their respective owners and the Gas Company makes no representation or warranty that their use will not infringe privately owned rights."

Legal Notice

"This report was prepared as a result of work sponsored by the California Public Utilities Commission (Commission). It does not necessarily represent the views of the Commission, its employees, or the State of California. The Commission, the State of California, its employees, contractors, and subcontractors make no warranty, express or implied, or assume no legal liability for the information in this report; nor does any party represent that the use of this information will not infringe upon privately owned rights. This report has not been approved or disapproved by the Commission nor has the Commission passed upon the accuracy of the information in this report."

Executive Summary

The Blodgett SHO-G gas-fired convection oven (Fig.1) was tested by the Gas Company for inclusion into its cooking energy efficiency program. Gas Company engineers tested the gas convection oven according to the specifications of the American Society for Testing and Materials' (ASTM) standard test method F 1496. To be considered energy efficient, a convection oven must achieve at least **40% efficiency** for the heavy-load cooking-energy efficiency test. The Blodgett SHO-G oven **passed** the standards as set forth. The test results for the Blodgett SHO-G are as follows:



Fig.1

Table ES-1. Summary of ASTM Convection Oven Performance Results

Heavy-load cooking-energy Efficiency (%)	44.5
Rated Energy Input Rate (Btu/h)	50,000
Measured Energy Input Rate (Btu/h)	52,984
Preheat Time to 340°F (min)	12.72
Preheat Energy to 340°F (Btu)	10,924
Idle Energy Rate @ 350°F (Btu/h)	14,521
Pilot Energy Rate (Btu/h)	N/A
Production Capacity (lb/h)	74.57

The heavy-load cooking-energy efficiency test consists of baking thirty russet potatoes on five full-size sheet pans. As specified by the ASTM test method, cooking-energy efficiency is a measure of how much of the energy that an appliance consumes is actually delivered to the food product during the cooking process. Cooking-energy efficiency is therefore defined by the following relationship:

$$\text{Cooking Energy Efficiency} = \frac{\text{Energy to Food}}{\text{Energy to Appliance}}$$

Commercial Foodservice Equipment Testing Program

Recent advances in equipment design have produced commercial foodservice equipment that operates more efficiently, quickly, safely and conveniently. Energy efficient commercial equipment reduces energy consumption primarily through advanced technology and design.

The purpose of the The Gas Company's Energy Efficiency Commercial Foodservice Equipment Testing Program is to provide energy efficiency measurement data for cost effectiveness modeling in order to establish energy efficiency standards and ratings for commercial food service equipment. This measurement data is then utilized and integrated with typical equipment usage profiles for California utility customer participants for the Food Service Equipment Rebate program.

Equipment performance is determined by applying the ASTM Standard Test Method for Performance. The ASTM standard test method is considered to be the industry standard for quantifying the efficiency and performance of ovens.

**Performance of Convection Ovens
RESULTS REPORTING SHEET
ASTM F 1496-99**

Manufacturer	Blodgett
Model	SHO-G
Date	8/3/06-8/4/06
Test Reference Number (Optional)	

1. Test Rack Oven (11.1)

Fuel type:	Natural gas
Half-size or full-size:	Full-size
Rated input:	50,000 Btu/h
Oven cavity volume (in. ³):	16,390

Controls (Lists and discusses control settings, including input rate, fan speed, fan mode, and moisture injection options):

The oven's control panel consisted of an analog thermostat control dial with temperature values in increments of 25°F and a maximum setting of 500°F, a three position blower control switch with "hi," "lo," and "off" options, a cool down control switch with "manual" and "auto" options, an indicator light for oven readiness, and a cook timer with a maximum setting of 60 minutes.

Description of operational characteristics:

The oven's thermostat was calibrated with the dial set at 350°F.

2. Apparatus (11.2)

 √ Check if testing apparatus conformed to specifications in Section 6.

Deviations:

3. Thermostat Calibration (11.4)

As-Received:

Oven temperature control setting (°F)	350
Oven cavity temperature (°F)	346.0
Oven temperature control setting (°F)	300
Oven cavity temperature (°F)	N/A

As-Adjusted:

Oven temperature control setting (°F)	350
Oven cavity temperature (°F)	350 ± 5
Oven temperature control setting (°F)	N/A
Oven cavity temperature (°F)	300 ± 5


4. Energy Input Rate (11.5)

Test voltage (V)	116.1
Gas heating value (Btu/ft ³)	1019
Measured (Btu/h)	52,984
Rated (Btu/h)	50,000
Percent difference between measured and rated (%)	6.0
Gas oven-fan and control energy rate (kW)	0.1516

5. Preheat Energy and Time (11.6)

Test Voltage (V)	116.1
Gas heating value (Btu/ft ³)	1019
Starting temperature (°F)	75.43
Energy consumption (Btu)	10,924
Electric energy consumption (kW)	0.1474
Duration (min)	12.72
Preheat rate (°F/min)	16.52

Preheat Curve

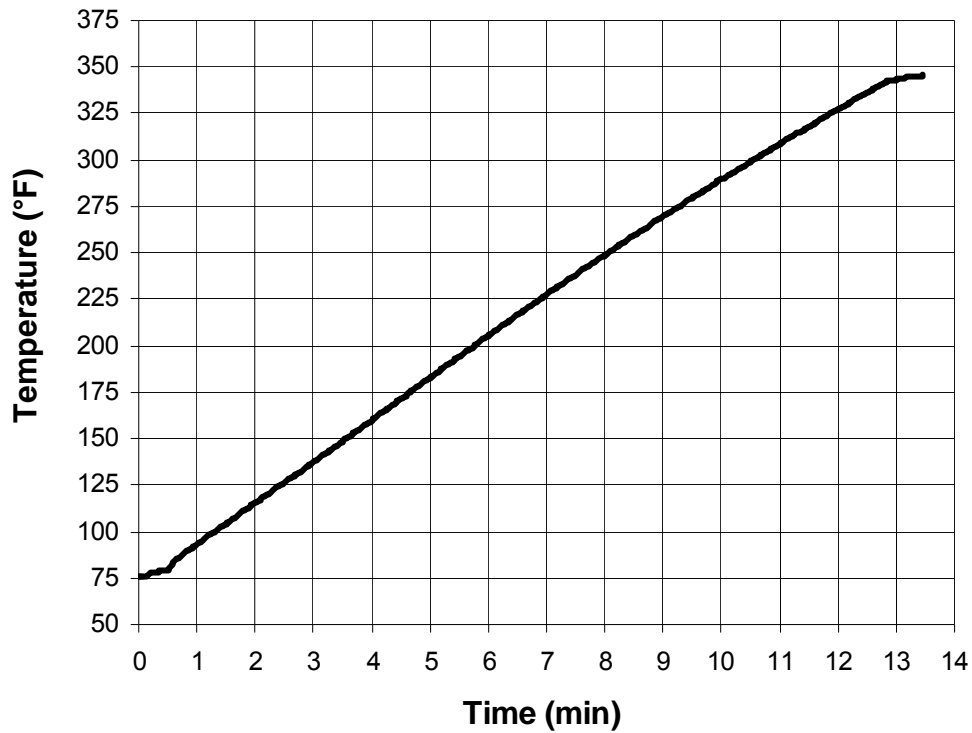

6. Pilot Energy Rate (if applicable) (11.7)

Gas heating value (Btu/ft ³)	N/A
Pilot energy rate (Btu/h)	N/A

7. Idle Energy Rate (11.8)

Test Voltage (V)	115.8
Gas heating value (Btu/ft ³)	1015
Idle energy rate at 350°F (Btu/h)	14,521
Electric energy rate at 350°F (kW)	0.1306

8. Cooking Energy Efficiency, Cooking Energy Rate, and Production Capacity (11.9)

Heavy-Load:

Test voltage (V)	115.5
Gas heating value (Btu/ft ³)	1019
Cooking time (min)	59.12
Production rate (lb/h)	74.57 ± 1.92
Energy to food (Btu/lb)	
Cooking energy rate (Btu/h)	42,768
Electric energy rate (kW)	0.1322
Energy per pound of food cooked (Btu/lb)	574
Cooking energy efficiency (%)	44.5 ± 0.261

Medium-Load:

Test voltage (V)	
Gas heating value (Btu/ft ³)	
Cooking time (min)	
Production rate (lb/h)	
Energy to food (Btu/lb)	
Cooking energy rate (Btu/h)	
Electric energy rate (kW)	
Energy per pound of food cooked (Btu/lb)	
Cooking energy efficiency (%)	

Light-Load:

Test voltage (V)	
Gas heating value (Btu/ft ³)	
Cooking time (min)	
Production rate (lb/h)	
Energy to food (Btu/lb)	
Cooking energy rate (Btu/h)	
Electric energy rate (kW)	
Energy per pound of food cooked (Btu/lb)	
Cooking energy efficiency (%)	

9. Cooking Uniformity (Frozen Macaroni and Cheese) (11.10)

Test voltage (V)	_____
Gas heating value (Btu/ft ³)	_____
	Average Rack Temperature (°F)
Rack	
1 (Top)	_____
2	_____
3	_____
4	_____
5 (Bottom)	_____
Cooking time (min)	_____
Production rate (lb/h)	_____
Energy to food (Btu/lb)	_____
Cooking energy rate (Btu/h)	_____
Electric energy rate (kW)	_____
Cooking energy efficiency (%)	_____

10. Browning Uniformity (White Sheet Cakes) (11.11)

Description of sheet cake browning and surface irregularities. Includes a sketch or photograph of the browning pattern and a discussion of the differences of the results from cake to cake.

Test voltage (V)	_____
Gas heating value (Btu/ft ³)	_____
Initial cake temperature (°F)	_____
Final cake temperature (°F)	_____
Initial cake weight (lb)	_____
Final cake weight (lb)	_____
Sheet cake cook time (min)	_____
Sheet cake cooking energy (Btu)	_____
Electric energy (kW)	_____

Signatures: The undersigned have performed the above test and have verified that the results recorded were the actual results observed.

SCG's Tester: _____ 08/16/06
(signature) (date)
ANDRE SALDIVAR

(print name)

**Foodservice Testing
UNCERTAINTY CALCULATION PROCEDURE
Annex**

Make: Blodgett
 Model: SHO-G
 Equipment Type: Convection Oven
 Test Results from Form: ASTM F 1496-99 (10.6)S
 Results Evaluated: Cooking Energy Efficiency

A. Test results

1. Iteration 1 $X_1 =$ 44.80
 2. Iteration 2 $X_2 =$ 44.33
 3. Iteration 3 $X_3 =$ 44.37
 4. Iteration 4 $X_4 =$ _____
 5. Iteration 5 $X_5 =$ _____
 6. Number of test results being evaluated: $n =$ 3

B. Calculations

1. $Xa_n = (1/n) * (X_1 + X_2 + \dots + X_n)$ $Xa_n =$ 44.50
 2. $S_n = \sqrt{\frac{A_n - B_n}{2}}$ $S_n =$ 0.002617
 a. $A_n = (X_1)^2 + (X_2)^2 + \dots + (X_n)^2$ $A_n =$ 0.59407
 b. $B_n = (1/n) * (X_1 + X_2 + \dots + X_n)^2$ $B_n =$ 0.59406
 3. $U_n = C_n * S_n$ $U_n =$ 0.006491
 a. C_n is found in the following table: $C_n =$ 2.48

Uncertainty Factors	
Test Results, n	Uncertainty Factors, C_n
3	2.48
4	1.59
5	1.24
6	1.05
7	0.92
8	0.84
9	0.77
10	0.72

4. $\%U_n = (U_n / X_{a_n}) * 100\%$

$\%U_n =$	1.46
-----------	------

C. Evaluation

1. Is $\%U_n \leq \pm 10\%$ [yes]

<u>YES</u>	<u>NO</u>	<u>N/A</u>
------------	-----------	------------

<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-------------------------------------	--------------------------	--------------------------

a. If $\%U_n \geq \pm 10\%$ then repeat the test.

Notes:

- Expected results are shown between brackets.

Comments:

Signatures: The undersigned have performed the above test and have verified that the results recorded were the actual results observed.

SCG's Tester:

(signature)

(date)

ANDRE SALDIVAR

(print name)

**Foodservice Testing
UNCERTAINTY CALCULATION PROCEDURE
Annex**

Make: Blodgett
 Model: SHO-G
 Equipment Type: Convection Oven
 Test Results from Form: ASTM F 1496-99 (10.6)S
 Results Evaluated: Production Rate

A. Test results

1. Iteration 1 $X_1 =$ 72.54
 2. Iteration 2 $X_2 =$ 74.82
 3. Iteration 3 $X_3 =$ 76.35
 4. Iteration 4 $X_4 =$ _____
 5. Iteration 5 $X_5 =$ _____
 6. Number of test results being evaluated: $n =$ _____

B. Calculations

1. $Xa_n = (1/n) * (X_1 + X_2 + \dots + X_n)$ $Xa_n =$ 74.57
 2. $S_n = \sqrt{\frac{A_n - B_n}{2}}$ $S_n =$ 1.92
 a. $A_n = (X_1)^2 + (X_2)^2 + \dots + (X_n)^2$ $A_n =$ 16,691
 b. $B_n = (1/n) * (X_1 + X_2 + \dots + X_n)^2$ $B_n =$ 16,683
 3. $U_n = C_n * S_n$ $U_n =$ 4.75
 a. C_n is found in the following table: $C_n =$ 2.48

Uncertainty Factors	
Test Results, n	Uncertainty Factors, C_n
3	2.48
4	1.59
5	1.24
6	1.05
7	0.92
8	0.84
9	0.77
10	0.72

4. $\%U_n = (U_n / X_{a_n}) * 100\%$

$\%U_n =$	6.37
-----------	------

C. Evaluation

1. Is $\%U_n \leq \pm 10\%$ [yes]

<u>YES</u>	<u>NO</u>	<u>N/A</u>
------------	-----------	------------

<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-------------------------------------	--------------------------	--------------------------

a. If $\%U_n \geq \pm 10\%$ then repeat the test.

Notes:

- Expected results are shown between brackets.

Comments:

Signatures: The undersigned have performed the above test and have verified that the results recorded were the actual results observed.

SCG's Tester:

(signature)

(date)

(print name)